



Single-phase dry-type isolation transformers finished in anti-flash varnished for maximum protection, insulation, noise and vibration reduction.

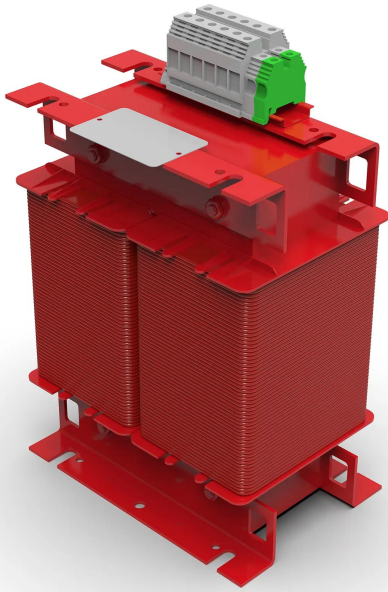

## Technical characteristics


|                     |                         |
|---------------------|-------------------------|
| Rating              | 40 kVA                  |
| Input voltage       | 230 V                   |
| Output voltage      | 230 V                   |
| Frequency           | 50/60 Hz                |
| Protection degree   | IP-00                   |
| Cooling             | AN                      |
| Ambient temperature | 45 °C                   |
| Temperature rise    | Class H - 180°C         |
| Insulation          | Class H - 180 °C        |
| Windings            | Class HC - 200 °C       |
| Test voltage        | 3 kV (1 min, 50 Hz)     |
| Standards           | IEC/EN/UNE-EN 60076, CE |
| Weight              | 171 kg                  |

## Dimensions

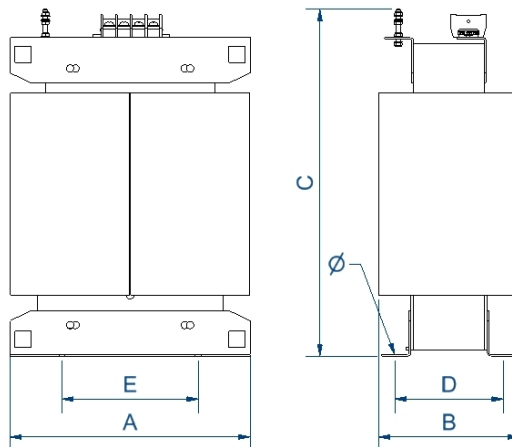

Dimensions (AxBxCxDxE): 440x301x575x176x250 mm 11Ø

## Electrical connection

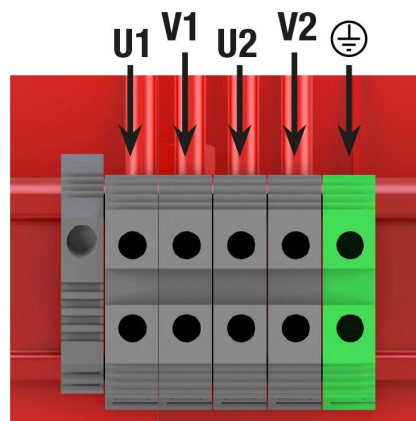

Single-phase dry-type isolation transformers finished in anti-flash varnished for maximum protection, insulation, noise and vibration reduction.

## Features

---

Dry type transformer

Anti-flash varnish finish, offering:

- Protection against corrosive environments
- Increase of electrical isolation
- High compression capacity
- Reduction of noise level
- Increase of product's lifespan

Safety class I

Includes lifting eyebolts from >10 kVA

Possibility of tailor-made manufacturing

## Applications

---

- TK transformers are used for the galvanic isolation of single-phase installations in the industrial and tertiary sectors for safety reasons.
- They are also used in the generation of ground referenced neutrals in high rating single-phase installations.
- On the other hand, in installations where there may be several earth leakages, TK transformers ensure supply by preventing the tripping of the main differential circuit breaker.
- To change the neutral regime of the installations, being able to go from a two-phase network to a single-phase network or vice versa (this case implies the generation of the artificial neutral).
- In installations where there may be small voltage peaks or with a certain level of electrical noise, the use of a transformer helps to improve the quality of the electrical network in its secondary.
- In outdoor installations where weather conditions are adverse, the TKZ version with IP-54 external enclosure offers an optimal solution.

Available accessories

- PT100 probe.
- PTC probe.
- Bimetallic probe.
- Temperature control unit

## Downloads

---

- [Obtaining a neutral - Bridge configuration TK \(PH+N output\).](#)
- [Installation and maintenance manual.](#)
- [CE Certificate.](#)