


Three-phase autotransformers for dry type neutral generator with anti-flash varnish finished for maximum protection, insulation, noise and vibration reduction.



## Technical characteristics


|                     |                         |
|---------------------|-------------------------|
| Rating              | 20 kVA                  |
| Input voltage       | 400 V                   |
| Output voltage      | NEUTRAL                 |
| Frequency           | 50/60 Hz                |
| Connection group    | ZN0                     |
| Protection degree   | IP-00                   |
| Cooling             | AN                      |
| Ambient temperature | 45 °C                   |
| Temperature rise    | Class F - 155°C         |
| Insulation          | Class H - 180°C         |
| Windings            | Class HC - 200 °C       |
| Test voltage        | 3 kV (1 min, 50 Hz)     |
| Standards           | IEC/EN/UNE-EN 61558, CE |
| Weight              | 84 kg                   |

## Dimensions

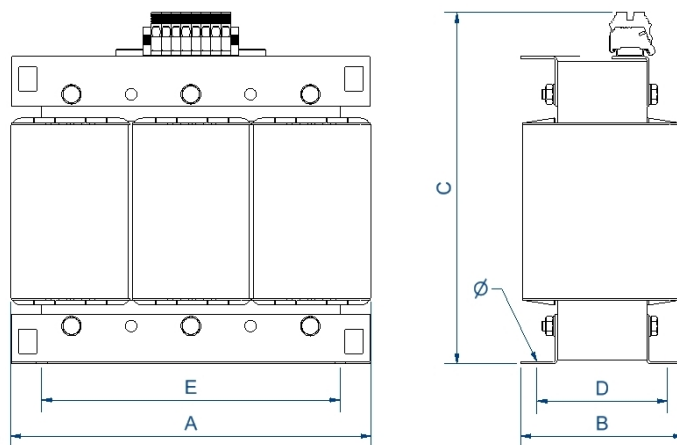

Dimensions (AxBxCxDxE): 420x190x419x156x350 mm 11Ø

## Electrical connection

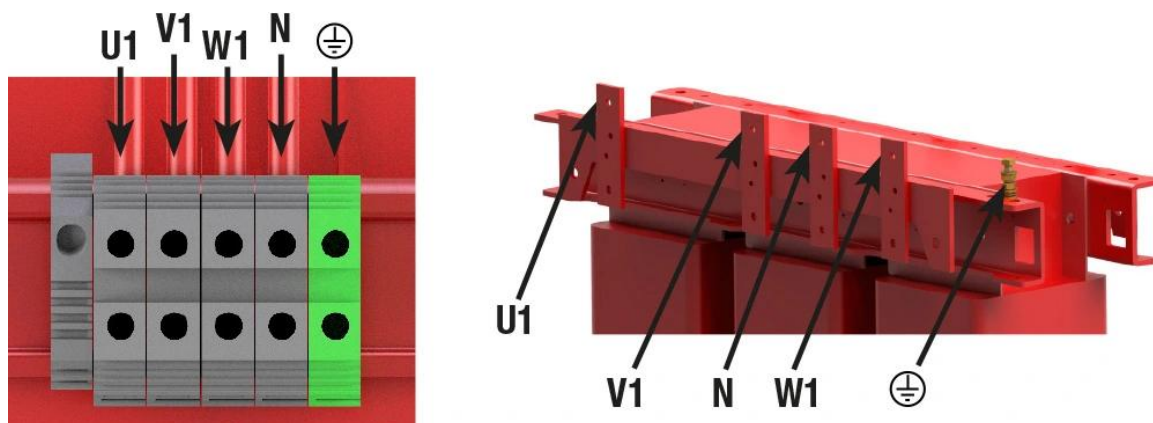

Three-phase autotransformers for dry type neutral generator with anti-flash varnish finished for maximum protection, insulation, noise and vibration reduction.

## Features

---

Dry type autotransformer

Anti-flash varnish finish, offering:

- Protection against corrosive environments
- Increase of electrical isolation
- High compression capacity
- Reduction of noise level
- Increase of product's lifespan

Safety class I

Includes stainless steel lifting eyebolts from 12,5 kVA

Possibility of tailor-made manufacturing

## Downloads

---