



Three-phase autotransformers for dry type neutral generator with anti-flash varnish finished for maximum protection, insulation, noise and vibration reduction.

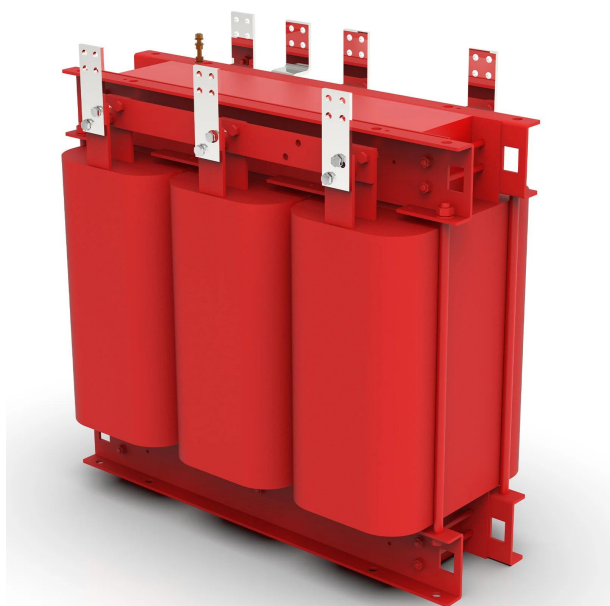

Technical characteristics



| | |
|---------------------|-------------------------|
| Rating | 200 kVA |
| Input voltage | 400 V |
| Output voltage | NEUTRAL |
| Frequency | 50/60 Hz |
| Connection group | ZN0 |
| Protection degree | IP-00 |
| Cooling | AN |
| Ambient temperature | 45 °C |
| Temperature rise | Class H - 180°C |
| Insulation | Class H - 180°C |
| Windings | Class HC - 200 °C |
| Test voltage | 3 kV (1 min, 50 Hz) |
| Standards | IEC/EN/UNE-EN 60076, CE |
| Weight | 406 kg |

Dimensions

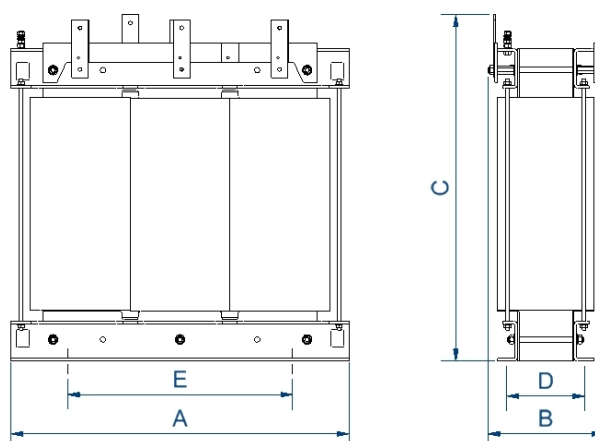

Dimensions (AxBxCxDxE): 670x380x690x270x599 mm 13Ø

Electrical connection

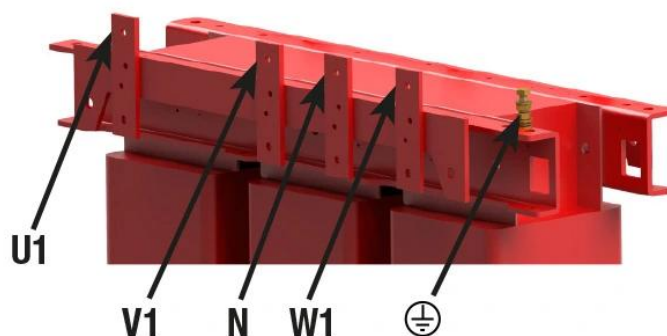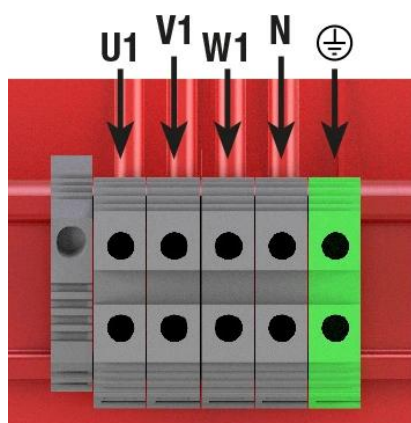

Three-phase autotransformers for dry type neutral generator with anti-flash varnish finished for maximum protection, insulation, noise and vibration reduction.

Features

Dry type autotransformer

Anti-flash varnish finish, offering:

- Protection against corrosive environments
- Increase of electrical isolation
- High compression capacity
- Reduction of noise level
- Increase of product's lifespan

Safety class I

Includes stainless steel lifting eyebolts from 12,5 kVA

Possibility of tailor-made manufacturing

Downloads
