


Single-phase dry type measuring transformers, finished in anti-flash varnished in IP20 enclosure with protection to prevent direct contact with electrical parts.




## Technical characteristics

Rating	2/5/7,5 VA (Cl. 0,2/0,5/1)
Input voltage	100..500 V ( $/\sqrt{3}$ )
Output voltage	100..110 V ( $/\sqrt{3}$ )
Frequency	50/60 Hz
Protection degree	IP-20
Cooling	ANAN
Ambient temperature	45°C
Thermal rating	6 times nominal rating
Oversvoltage	1,2 times nominal voltage
Temperature rise	Class B - 130°C
Insulation	Class H - 180°C
Windings	Class HC - 200 °C
Test voltage	3 kV (1 min, 50 Hz)
Standards	IEC/EN/UNE-EN 61869-3, CE
Mounting	Screws and DIN Rail
Weight	2,3 kg

## Electric scheme

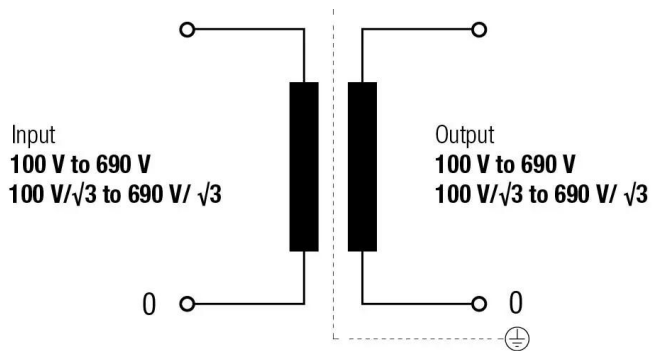

## Dimensions

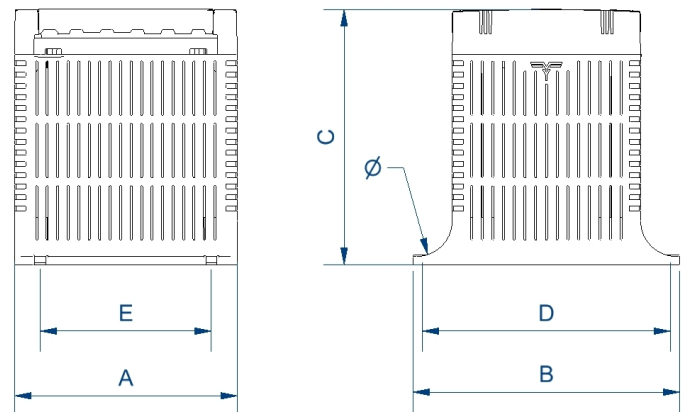

Dimensions (AxBxCxDxE): 106x123x122x111x74 mm 5Ø

Single-phase dry type measuring transformers, finished in anti-flash varnished in IP20 enclosure with protection to prevent direct contact with electrical parts.

## Features

---

Dry type transformer

IP-20 enclosure in last generation V-0 fireproof polymer box according to UL94

Safety class I, convertible in class II

Includes LED functioning indicator

Possibility of tailor-made manufacturing

## Downloads

---