


Single-phase dry type reversible autotransformers, in IP20 enclosure resin filled with protection against direct contact with electrical parts.




Technical characteristics

Rating	1000 VA
Input voltage	400 V
Output voltage	230 V
Frequency	50/60 Hz
Protection degree	IP-20
Cooling	ANAN
Ambient temperature	45°C
Temperature rise	Class B - 130°C
Insulation	Class H - 180°C
Windings	Class HC - 200 °C
Test voltage	3 kV (1 min, 50 Hz)
Standards	IEC/EN/UNE-EN 61558, CE
Mounting	Screws
Weight	5,6 kg

Electric scheme

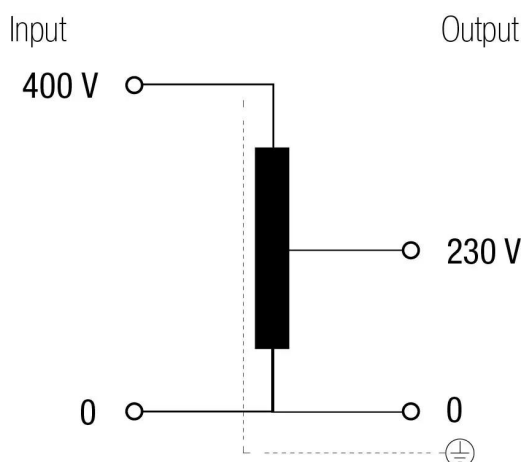

Dimensions

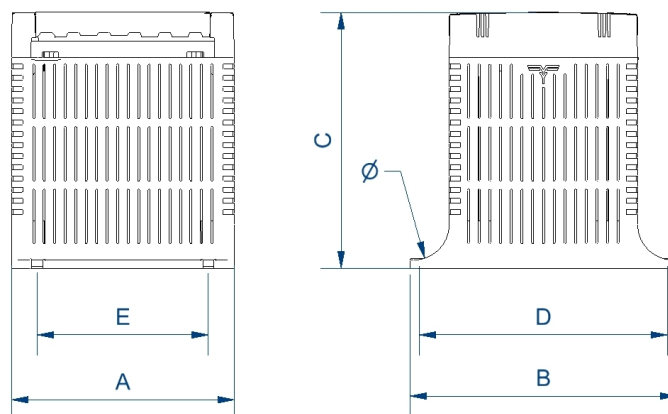

Dimensions (AxBxCxDxE): 118x138x132x122x88 mm 5∅

Single-phase dry type reversible autotransformers, in IP20 enclosure resin filled with protection against direct contact with electrical parts.

Features

Dry type resin cast autotransformer

Advantages of resin technology:

- Protection against corrosive environments
- Protection against high vibration levels
- Protection against electrodynamic efforts
- Reduction of noise level
- Increase of product's lifespan

IP-20 enclosure:

- Last generation V-0 fireproof polymer box according to UL94 up to 2500 VA
- Polyester resin from 3150 VA

Safety class I, convertible in class II up to 2500 VA

Includes LED functioning indicator

Possibility of tailor-made manufacturing

Downloads
