


Single-phase dry type reversible autotransformers, in IP20 enclosure resin filled with protection against direct contact with electrical parts.




Technical characteristics

| | |
|---------------------|-------------------------|
| Rating | 630 VA |
| Input voltage | 400 V |
| Output voltage | 230 V |
| Frequency | 50/60 Hz |
| Protection degree | IP-20 |
| Cooling | ANAN |
| Ambient temperature | 45°C |
| Temperature rise | Class B - 130°C |
| Insulation | Class H - 180°C |
| Windings | Class HC - 200 °C |
| Test voltage | 3 kV (1 min, 50 Hz) |
| Standards | IEC/EN/UNE-EN 61558, CE |
| Mounting | Screws |
| Weight | 3,7 kg |

Electric scheme

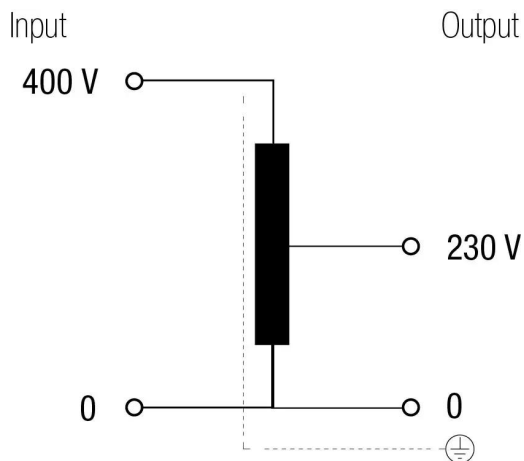

Dimensions

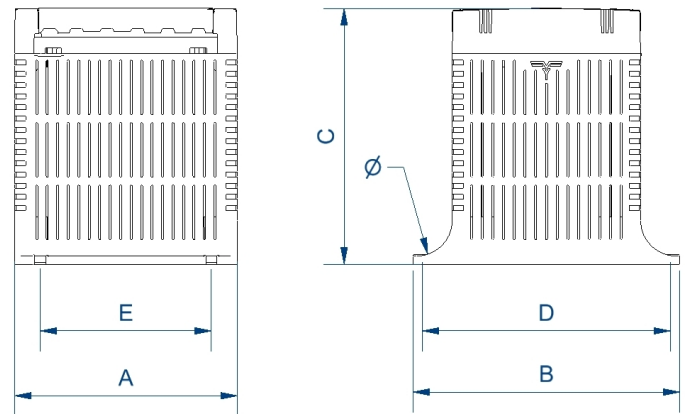

Dimensions (AxBxCxDxE): 106x123x122x111x74 mm 5Ø

Single-phase dry type reversible autotransformers, in IP20 enclosure resin filled with protection against direct contact with electrical parts.

Features

Dry type resin cast autotransformer

Advantages of resin technology:

- Protection against corrosive environments
- Protection against high vibration levels
- Protection against electrodynamic efforts
- Reduction of noise level
- Increase of product's lifespan

IP-20 enclosure:

- Last generation V-0 fireproof polymer box according to UL94 up to 2500 VA
- Polyester resin from 3150 VA

Safety class I, convertible in class II up to 2500 VA

Includes LED functioning indicator

Possibility of tailor-made manufacturing

Downloads
