


Single-phase isolation transformers for powering operating theatre spotlights with input regulation and multi-output.




Technical characteristics

| | |
|---------------------|---------------------------|
| Rating | 160 VA |
| Input voltage | 230 V±5% |
| Output voltage | 24-25-26-27 V |
| Frequency | 50/60 Hz |
| Protection degree | IP-20 |
| Cooling | ANAN |
| Ambient temperature | 45 °C |
| Temperature rise | Class B - 130°C |
| Insulation | Class H - 180°C |
| Windings | Class HC - 200 °C |
| Test voltage | 2,5 kV (1 min, 50 Hz) |
| Standards | IEC/EN/UNE-EN 61558-1, CE |
| Mounting | Screws and DIN Rail |
| Weight | 2,3 kg |

Electric scheme

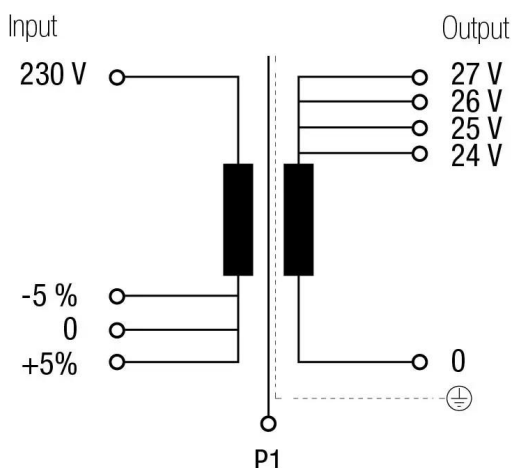


Dimensions

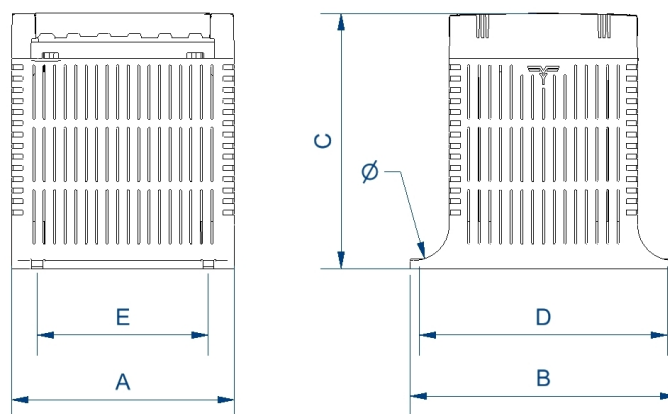

Dimensions (AxBxCxDxE): 106x123x118x110x74 mm 5Ø

Electrical connection

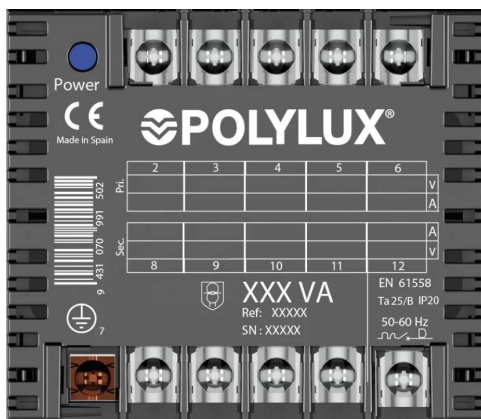

Input:

- 230-5% V
- 230 V
- 230+5% V

- Connection: 2-3
- Connection: 2-4
- Connection: 2-5

Output:

- 24 V
 - 25 V
 - 26 V
 - 27 V
- Connection: 8-9
 - Connection: 8-10
 - Connection: 8-11
 - Connection: 8-12

Single-phase isolation transformers for powering operating theatre spotlights with input regulation and multi-output.

Features

- Dry type transformer
- IP-20 enclosure in last generation V-0 fireproof polymer box, according to UL94
- Safety class I, convertible in class II
- Includes LED functioning indicator and electrostatic screen
- Full power capacity in every connection
- Optional protection fuse
- Possibility of tailor-made manufacturing

Downloads
