


Three-phase isolation transformers for medical use under IEC/EN 61558-2-15 standard, dry type finished in anti-flash varnished in IP23 metal enclosure with protection to prevent direct contact with electrical parts.



## Technical characteristics


Rating	10000 VA
Input voltage	400 V
Output voltage	230 V
Frequency	50/60 Hz
Connection group	YNyn0
Cover	Metal enclosure RAL 7035 (cat. C3 ISO 12994-2)
Protection degree	IP-23 / IK-08
Cooling	ANAN
Ambient temperature	45 °C
Inrush current	< 8In
Temperature rise	Class F - 155°C
Insulation	Class H - 180°C
Windings	Class HC - 200 °C
Test voltage	4,5 kV (1 min, 50 Hz)
No load voltage	< 3 %
Leakage current	0,5 mA (sec-earth)
Standards	IEC/EN/UNE-EN 61558-2-15, CE
Includes	Electrostatic screen between 1º & 2º and bimetal thermal protection
Weight	92 kg

## Dimensions

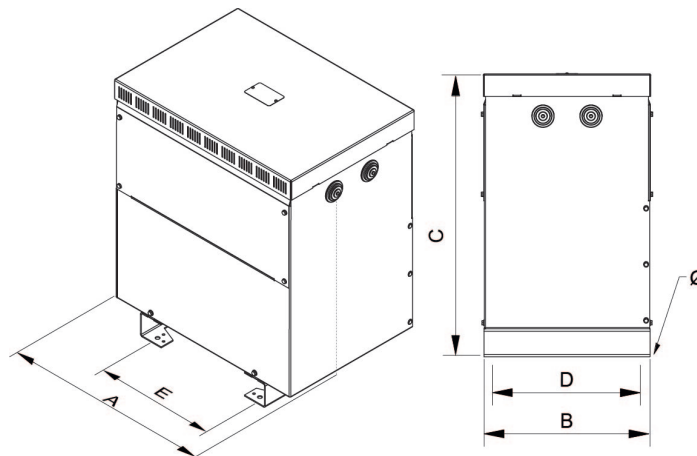

Dimensions (AxBxCxDxE): 458x340x500x300x300 mm 12Ø

## Electrical connection

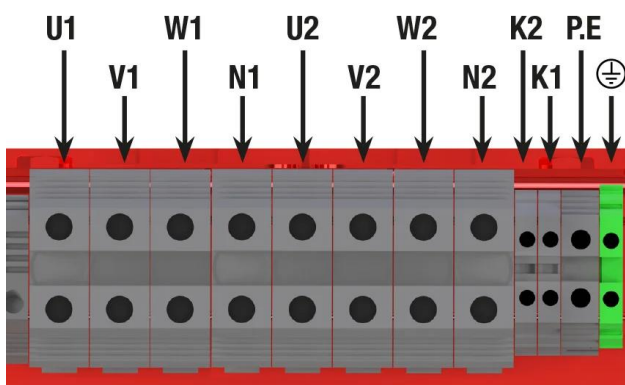

U1 = 400 V

V1 = 400 V

W1 = 400 V

N1 = Neutro 1

U2 = 230 V

V2 = 230 V

W2 = 230 V

N2 = Neutro 2

K1 = termostato klixon 150°C para 1ª bobina

K2 = termostato klixon 150°C para 2ª bobina

P.E = electrostatic shield

del Vallès (Barcelona) - Phone +34 93 692 65 65 - [polylux@polylux.com](mailto:polylux@polylux.com)

Three-phase isolation transformers for medical use under IEC/EN 61558-2-15 standard, dry type finished in anti-flash varnished in IP23 metal enclosure with protection to prevent direct contact with electrical parts.

## Features

---

Dry type transformer

Anti-flash varnish finish, offering:

- Protection against corrosive environments
- Increase of electrical isolation
- High compression capacity
- Reduction of noise level
- Increase of product's lifespan

Metalic box IP-23 enclosure painted with epoxy polyester resin RAL 7035 (cat. C2 ISO 12994-2)

Safety class I

Includes electrostatic screen between primary and secondary terminals and bimetallic temperature sensor

Includes also lifting eyebolts from X VA

Possibility of tailor-made manufacturing

## Downloads

---