

# 1. Three phase autotransformers for voltage changing

AUT FAMILY > AUTW12.5



## Features

Dry type autotransformer

Anti-flash varnish finish, offering:

Protection against corrosive environments

Increase of electrical isolation

High compression capacity

Reduction of noise level

Increase of product's lifespan

Metallic box IP-23 enclosure painted with epoxy polyester resin RAL 7035 (cat. C2 ISO 12994-2)


Safety class I

Includes stainless steel lifting eyebolts from 25 kVA

Possibility of tailor-made manufacturing

## Technical Characteristics

Rating	12,5 kVA
Input voltage	400 V
Output voltage	230 V
Frequency	50/60 Hz
Connection group	YN0
Cover	Metal enclosure RAL 7035 (cat. C3 ISO 12994-2)
Protection degree	IP-23 / IK-08
Cooling	ANAN
Ambient temperature	40°C
Temperature rise	Class F
Insulation	Class F - 155°C
Windings	Class HC - 200 °C
Test voltage	3 kV (1 min, 50 Hz)
Standards	IEC/EN/UNE-EN 61558, CE
Weight	42 kg
Dimensions	385x260x384x245x250 mm 6Ø

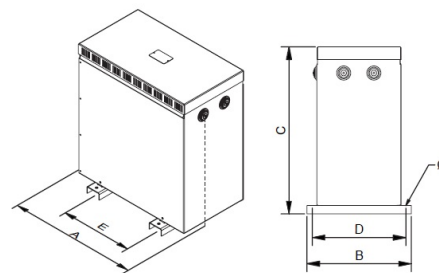

+ Info [www.polylux.com](http://www.polylux.com)

Productos equivalentes