

# 1. Three phase isolating transformers

TT FAMILY > TTW8

**POLYLUX**



## Features

Dry type transformer

Anti-flash varnish finish, offering:

Protection against corrosive environments

Increase of electrical isolation

High compression capacity

Reduction of noise level

Increase of product's lifespan?

Safety class I

Includes lifting eyebolts from >10 kVA

Possibility of tailor-made manufacturing

## Technical Characteristics

Rating 8 kVA

Input voltage 400 V

Output voltage 400 V

Frequency 50/60 Hz

Connection group Yyn0

Cover Metal enclosure RAL 7035 (cat. C3 ISO 12994-2)

Protection degree IP-23 / IK-08

Cooling ANAN

Ambient temperature 40°C

Temperature rise Class F

Insulation Class F - 155°C


Windings Class HC - 220°C

Test voltage 3 kV (1 min, 50 Hz)

Standards IEC/EN/UNE-EN 61558, CE

Weight 73 kg

Dimensions 454x340x500x300x300 mm 12Ø

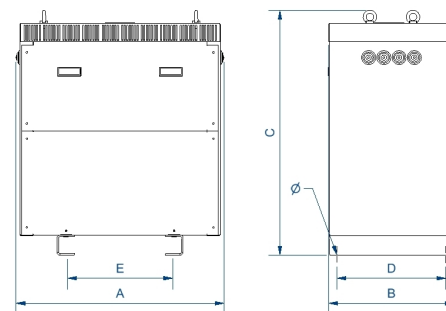

+ Info [www.polylux.com](http://www.polylux.com)

Productos equivalentes