


Single-phase dry type reversible autotransformers, in IP20 enclosure resin filled with protection against direct contact with electrical parts.




### Technical characteristics

Rating	315 VA
Input voltage	400 V
Output voltage	230 V
Frequency	50/60 Hz
Protection degree	IP-20
Cooling	ANAN
Ambient temperature	45°C
Temperature rise	Class B - 130°C
Insulation	Class H - 180°C
Windings	Class HC - 200 °C
Test voltage	3 kV (1 min, 50 Hz)
Standards	IEC/EN/UNE-EN 61558, CE
Mounting	Screws
Weight	2,6 kg

### Electric scheme

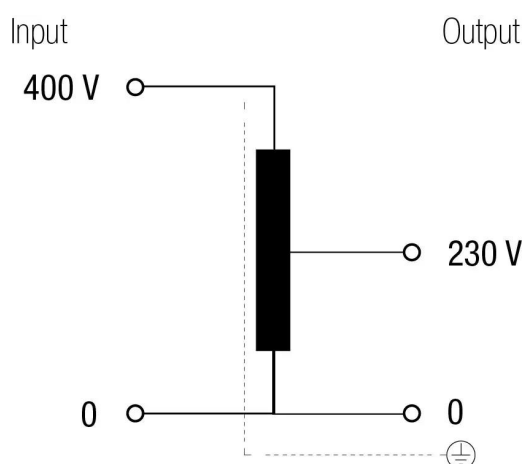

### Dimensions

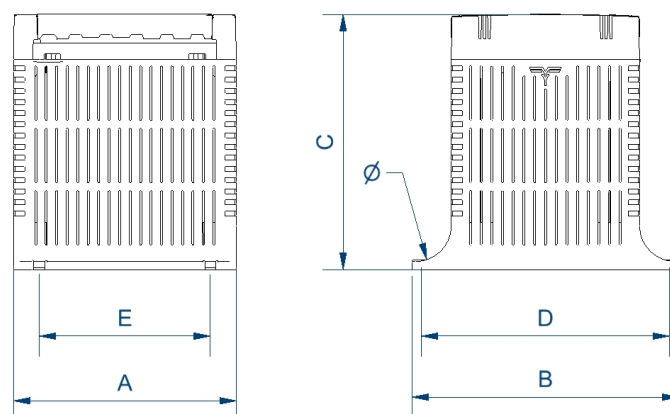

Dimensions (AxBxCxDxE): 106x123x122x111x74 mm 5Ø

Single-phase dry type reversible autotransformers, in IP20 enclosure resin filled with protection against direct contact with electrical parts.

## Features

---

Dry type resin cast autotransformer

Advantages of resin technology:

- Protection against corrosive environments
- Protection against high vibration levels
- Protection against electrodynamic efforts
- Reduction of noise level
- Increase of product's lifespan

IP-20 enclosure:

- Last generation V-0 fireproof polymer box according to UL94 up to 2500 VA
- Polyester resin from 3150 VA

Safety class I, convertible in class II up to 2500 VA

Includes LED functioning indicator

Possibility of tailor-made manufacturing

## Downloads

---