



Single-phase isolation transformers for medical use under IEC/EN 61558-2-15 standard, dry type with anti-flash varnish finished for maximum protection, insulation, noise and vibration reduction.

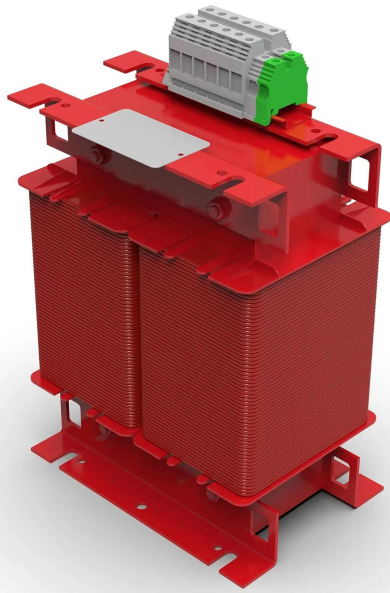

Technical characteristics


Rating	3150 VA
Input voltage	230 V
Output voltage	230 V (115-0-115 V)
Frequency	50/60 Hz
Protection degree	IP-00
Cooling	AN
Ambient temperature	45 °C
Inrush current	< 8In
Temperature rise	Class F - 155°C
Insulation	Class H - 180°C
Windings	Class HC - 200 °C
Test voltage	3,5 kV (1 min, 50 Hz)
No load voltage	< 3 %
Leakage current	0,5 mA (sec-earth)
Standards	IEC/EN/UNE-EN 61558-2-15, CE UL 5085-1 / UL 5085-2 CAN/CSA C22.2 No 66.1-06, CAN/CSA C22.2 No 66.2-06
Certifications	UL RECOGNIZED - CONSTRUCTION ONLY - Component FILE: E532753
Includes	Bimetal thermal contact & electrostatic screen between 1 ^o and 2 ^o
Weight	27,3 kg

Electric scheme

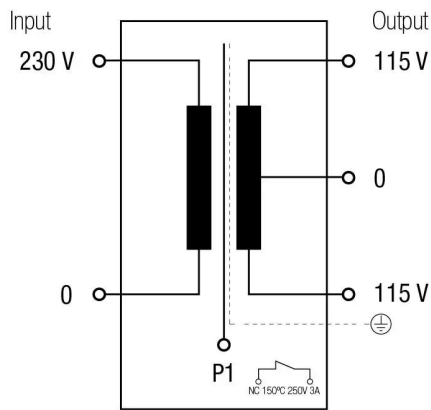


*Klixon 150°C 250 V 3 A included

Dimensions

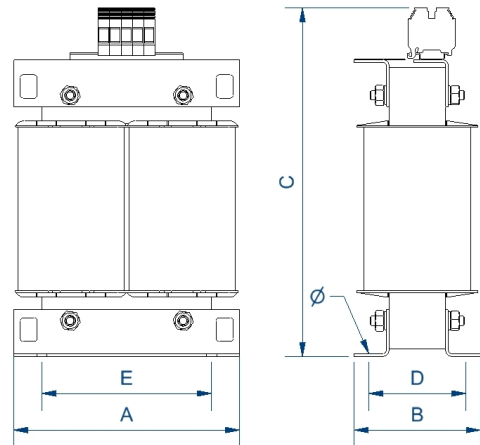

Dimensions (AxBxCxDxE): 240x140x355x112x180 mm 90°

Electrical connection

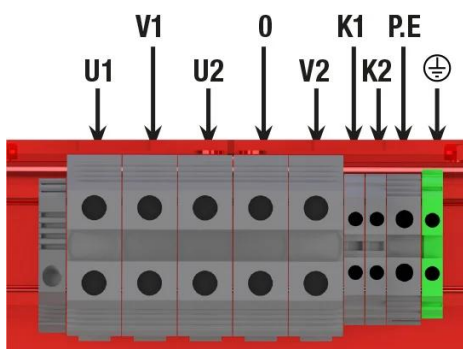

- U1 = 0
- V1 = 230 V
- U2 = 115 V
- V2 = 115 V
- K1 = termostato klixon 150°C para 1^o bobina
- K2 = termostato klixon 150°C para 2^o bobina
- P.E = electrostatic shield

Single-phase isolation transformers for medical use under IEC/EN 61558-2-15 standard, dry type with anti-flash varnish finished for maximum protection, insulation, noise and vibration reduction.

Features

Dry type transformer

Anti-flash varnish finish, offering:

- Protection against corrosive environments
- Increase of electrical isolation
- High compression capacity
- Reduction of noise level
- Increase of product's lifespan

Safety class I

Includes electrostatic screen between primary and secondary terminals and bimetallic temperature sensor

Includes also lifting eyebolts from X VA

Possibility of tailor-made manufacturing

Downloads
